

### DESCRIPTION

The UHC-120 ultrasonic thermal energy meters measure consumed heating and/or cooling energy in multi-family residences or commercial buildings. The sealed meter is delivered in user configuration mode with the ability to modify meter parameters and features, including units, mounting position, communication and other meter parameters. After the meter is operational, the settings cannot be changed to prevent unauthorized changes that may affect the meter output.

- Residential and commercial use
- MID DN15...DN40
- Canada 1/2...1-1/2 in. NPT

### FEATURES

- Static liquid metering using ultrasonic technology
- EN1434 heat and cool approval for Accuracy Class 2
- Measurement Canada heat and cool meter approval, Accuracy Class 2
- Ten-year battery life or external power options
- Modular communication options
- Mounting in any installation position
- Integral data logger with time/date

### BENEFITS

- Fast response with dynamic temperature measurement cycle
- Low maintenance with no moving parts to wear
- Simple setup using single-button display
- Measure and record energy and flow totals
- View daily and previous semi-monthly totals

### APPLICATIONS

Monitor thermal energy in water based heating and cooling systems:

- Residential apartment or condominium tenant billing
- Commercial building or office tenant billing


### COMMUNICATION/OUTPUT OPTIONS

- Wired M-Bus
- Pulse output
- Modbus RTU



### OPERATION

Each UHC-120 meter includes a flow meter, a matched pair of insertion RTDs and calculator electronics. By measuring the flow rate of the heating or chilling water and the temperature drop across a zone, the calculator of the meter determines the thermal energy used.

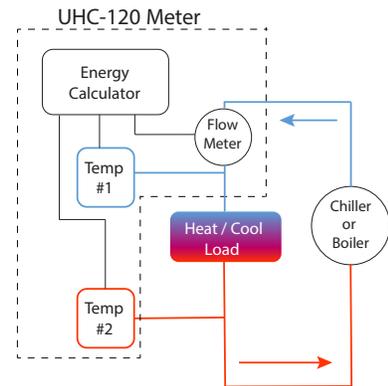

Flow Rate, Temperature Delta → Energy

## METER SPECIFICATIONS

<b>Accuracy</b>	Class 2 EN1434:2015 certified heating meter Class 2 EN1434:2015 certified cooling meter Class 2 Canada Weights and Measures heating/cooling meter, wired M-Bus or Pulse output
<b>Thermal Energy Meter Directives and Standards</b>	Measuring Instruments Directive 2014/32/EU EN1434 (2015) PTB-Tichtlinie K7.1, K7.2 (2006) OIML R75: (2002/2006) ISO 4064 (2014)
<b>Additional Directives and Standards</b>	EMC Directive 2014/30/EU RoHS Directive 2011/65/EU
<b>Approvals</b>	DE-16-MI004-PTB025 (MID heat) DE-16-M-PTB-0097 (national German cooling) CH-T2-18768-00 (national Swiss cooling) Measurement Canada AV-2485C

### Flow Ranges for Metric Pipe with DN Flange and G Thread

Permanent flow rate $q_p$ , m <sup>3</sup> /h	Upper flow rate $q_u$ , m <sup>3</sup> /h	Lower flow rate $q_l$ , m <sup>3</sup> /h	Dynamic range	Length of the flow sensor L, mm	Pressure losses at $q_p$ , bar	Joining to the pipeline (Thread - G, flange - DN)
1.5	3	0.012	1:125	110	0.21	G3/4B
1.5	3	0.012	1:125	130; 190 <sup>1</sup>	0.04	G1B
2.5	5	0.025	1:100	130; 190 <sup>1</sup>	0.12	G1B
3.5	7	0.028	1:125	130; 190 <sup>1</sup>	0.21	G1B
3.5	7	0.028	1:125	150 <sup>1</sup> ; 260	0.21	G1 1/4B
6	12	0.06	1:100	150 <sup>1</sup> ; 260	0.20	G1 1/4B
10	20	0.1	1:100	200 <sup>1</sup> ; 300	0.11	G2B

<sup>1</sup> Special Order

### Flow Ranges for U.S./Canada ASME/ANSI Pipe with NPT Thread

Permanent flow rate $q_p$ , gpm (m <sup>3</sup> /h)	Upper flow rate $q_u$ , gpm (m <sup>3</sup> /h)	Lower flow rate $q_l$ , gpm (m <sup>3</sup> /h)	Dynamic Range, gpm (m <sup>3</sup> /h)	Length of the flow sensor & coupling, in. (mm)	Pressure losses at $q_p$ , psi (bar)	Joining to the pipeline (Thread, Meter Body)
6.6 (1.5)	13.2 (3)	0.053 (0.012)	1:125	6.7 (170)	3.0 (0.21)	1/2 in. NPT (DN15)
6.6 (1.5)	13.2 (3)	0.053 (0.012)	1:125	7.6 (193)	0.6 (0.04)	3/4 in. NPT (DN20)
11 (2.5)	22 (5)	0.110 (0.025)	1:100	7.6 (193)	1.7 (0.12)	3/4 in. NPT (DN20)
15.4 (3.5)	30.8 (7)	0.123 (0.028)	1:125	9.0 (229)	3.0 (0.21)	1 in. NPT (DN25)
26.4 (6)	52.8 (12)	0.264 (0.060)	1:100	9.0 (229)	2.9 (0.20)	1 in. NPT (DN25)
44 (10)	88 (20)	0.440 (0.100)	1:100	10.7 (273)	1.6 (0.11)	1-1/2 in. NPT (DN40)

## MECHANICAL SPECIFICATIONS

<b>Protection Class</b>	IP68
<b>Mechanical Class</b>	M2
<b>Electromagnetic Class</b>	E2
<b>Environmental Class</b>	C
<b>Medium Temperature</b>	Cooling 41...122° F (5...50° C); Heating 59...194° F (15...90° C)
<b>Medium</b>	Water
<b>Installation Position</b>	All installation positions (vertical, horizontal, rising pipe, down pipe)
<b>Straight Pipe Lengths</b>	DN40 body and smaller
<b>Nominal Pressure</b>	PN16 (232 psi, 16 bar)
<b>Flow Sensor Cable Length</b>	2.7 ft (0.85 m)


## CALCULATOR FUNCTIONS

### LCD Indicator

The device is equipped with 8-digits LCD (Liquid Crystal Display) with special symbols to display parameters, measurement units and operation modes.

The following information can be displayed:

- Total heat and/or cooling since start of operation
- Total flow flow volume
- Power and flow rate
- Inlet and outlet temperatures, temperature difference
- Semimonthly values
- Maximum power, flow and temperatures

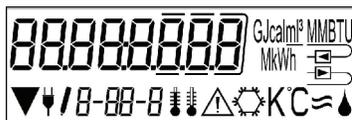

### Optical Interface

Integrated into the front panel of the calculator, the optical interface is designed for reading data and parameters of the meter.

### Data Logger History Values

Semimonthly values of the measured parameters are stored in internal memory for up to 15 months

- Heating energy
- Cooling energy
- Volume
- Tariff register

Maximum power, flow rate, inlet temperature, outlet temperature, and temperature difference

Time of storage of all measured integral data, also without power supply to the electronic unit: at least 15 years.

## CALCULATOR SPECIFICATIONS

<b>LCD Display</b>	8-digit plus special characters; Heat energy up to 3 decimal places
<b>Protection Class</b>	IP65
<b>Ambient Temperature in the Field</b>	41...131° F (5...55° C) at 95 % relative humidity
<b>Transport Temperature</b>	-13...158° F (-25...70° C) for maximal 168 h
<b>Storage Temperature</b>	-13...131° F (-25...55° C)
<b>Units</b>	Total Heating/Cooling Energy: MWh (default), kWh, GJ, MMBTU, Gcal Power: kW Volume: m3, Flow: m3/h Energy unit can be set as long as the amount of energy is ≤ 10 kWh
<b>Power</b>	Replaceable battery 10 years, including 2 pulse output, 1 pulse output 6 years + 1 year storage; 24V AC power supply module, or 230V AC power supply
<b>Temperature Sensor</b>	Pt 1000, direct insert short (DS), M10 screw, 26 mm insertion depth; cable length 4.9 ft, 9.8 ft, 19 ft (1.5 m, 3 m, 6 m)
<b>Temperature Difference Range <math>\Delta\Theta</math></b>	Heat: 3...100 K; Cooling: -3...-50K
<b>Minimum Temperature Difference <math>\Delta\Theta</math></b>	Heating/Cooling: >0.5 / <-0.5 K
<b>Temperature Resolution</b>	0.01° C
<b>Measurement Cycle Temperature; Dynamic</b>	2 / 60 seconds; with external power operation permanently 2 seconds
<b>Flow Measurement Cycle</b>	2 seconds
<b>Calculator Mounting</b>	Meter mounted, DIN-rail or wall
<b>Data Storage</b>	15 monthly and semi-monthly values via display; 24 monthly and semi-monthly values via optical interface or M-Bus 2 tariff registers individually adjustable; save energy or time Storage of the maximum values for flow, power and temperatures (VL, RL, $\Delta\Theta$ ), as well as the respective maximum values of the last 15 months
<b>Billing Dates</b>	Selectable annual billing date

### Communication/Output Options

**NOTE:** Only **ONE** option is supplied with the meter.

- Wired M-Bus
- Modbus RTU EIA-485, baud rate 1200, 2400, 4800, 9600, 1440, 19200, 38400, 56000, 57600, 115200; powered separately with supplied voltage 12...24V DC ± 10 % (SELV power supply only), maximum power consumption 500 mW; not available with Measurement Canada approval
- Pulse 1 (or 2 for heating/cooling) open collector outputs: 30 V DC; width 100 ms; 2nd output for cooling only or heating only for volume; 2nd output for heating/cooling is cooling energy

### One Pulse Output for Energy

	Display in kWh / MWh	Display in Gcal	Display in GJ	Display in MMBTU
qp 1,5 m <sup>3</sup> /h	1 kWh/Imp	1 Mcal/Imp	10 MJ/Imp	10 MMBTU/Imp
qp 2,5 m <sup>3</sup> /h	1 kWh/Imp	1 Mcal/Imp	10 MJ/Imp	10 MMBTU/Imp
qp 3,5 m <sup>3</sup> /h	10 kWh/Imp	10 Mcal/Imp	10 MJ/Imp	10 MMBTU/Imp
qp 6 m <sup>3</sup> /h	10 kWh/Imp	10 Mcal/Imp	10 MJ/Imp	10 MMBTU/Imp
qp 10 m <sup>3</sup> /h	10 kWh/Imp	10 Mcal/Imp	10 MJ/Imp	10 MMBTU/Imp

### Two Pulse Output for Energy

The pulse value for the energy always applies: 1 kWh/pulse, 0.001 MWh/pulse, 0.001 GJ, 1 Mcal/pulse, 10 MMBTU/pulse

### Pulse Output for Volume

For one pulse output, the pulse value for the volume always applies: Display in m<sup>3</sup> -> pulse value: 100 l/pulse (0.1 m<sup>3</sup>/pulse).

For two pulse output, the pulse value for the volume always applies. 10 l/pulse (0.01 m<sup>3</sup>/pulse).

## DIMENSIONS

### Meter

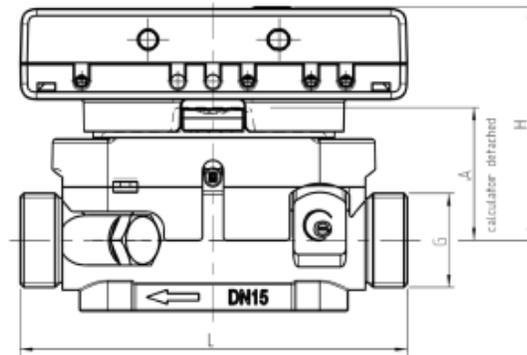


Figure 1: Overall calculator dimensions of UHC-120 heat meter

Qp (m <sup>3</sup> /h)	Nominal Size	G (")	L (mm)	H (mm)	A (mm)	Weight Standard Version kg
1,5	DN 15	G3/4B	110	65	38,5	0,600
1,5	DN 20	G1B	130	66	39,5	0,680
2,5	DN 20	G1B	130	66	39,5	0,680
3,5	DN 25	G1 1/4B	260	66	39,5	1,080
6,0	DN 25	G1 1/4B	260	68,5	42	1,080
10,0	DN 40	G2B	300	73	46,5	1,970

### Calculator Dimensions

H × W × D

3.0 × 4.4 × 1.4 in. (75 × 110 × 35 mm)

## ORDERING DETAILS

### UHC-120 Meters

Meters have European G threads (BSPP) which are not compatible with NPT threads commonly used in U.S. and Canada and are sized differently. Couplers are required for to convert the thread types. See *Kits for ASME/ANSI Pipes*.

#### UHC-120 Cooling Meters with G threads, Wired M-Bus, Battery

Part Number	Description
DHM-S3-DAASXX-M1XX15-KR	UHC-120 Meter Return, 1.5 m <sup>3</sup> /h nominal, G 3/4, 4.9 ft (1.5 m) temp. sensor cables
DHM-S3-DBASXX-M1XX15-KR	UHC-120 Meter Return, 1.5 m <sup>3</sup> /h nominal, G1, 4.9 ft (1.5 m) temp. sensor cables
DHM-S3-DBBSXX-M1XX15-KR	UHC-120 Meter Return, 2.5 m <sup>3</sup> /h nominal, G1, 4.9 ft (1.5 m) temp. sensor cables
DHM-S3-DCCSXX-M1XX15-KR	UHC-120 Meter Return, 3.5 m <sup>3</sup> /h nominal, G 1-1/4, 4.9 ft (1.5 m) temp. sensor cables
DHM-S3-DCDSXX-M1XX15-KR	UHC-120 Meter Return, 6 m <sup>3</sup> /h nominal, G 1-1/4, 4.9 ft (1.5 m) temp. sensor cables
DHM-S3-DDESXX-M1XX15-KR	UHC-120 Meter Return, 10 m <sup>3</sup> /h nominal, G 2, 4.9 ft (1.5 m) temp. sensor cables

Temperature sensor mounting hardware included. Additional options available upon request.

#### UHC-120 Kits for ASME/ANSI Pipes (Meter & Couplings)

#### UHC-120 Heating/Cooling Meter with Wired M-Bus, Battery, Measurements Canada Approval

ASME/ANSI Connection	Part Number	Description
1/2 in. NPT	DHM-S3-CNASXX-M1XX15-KR	UHC-120 Meter Return, 6.6 gpm (1.5 m <sup>3</sup> /h) nominal, 1/2 in. NPT, 4.9 ft (1.5 m) temp. sensor cables
3/4 in. NPT	DHM-S3-CPASXX-M1XX15-KR	UHC-120 Meter Return, 6.6 gpm (1.5 m <sup>3</sup> /h) nominal, 3/4 in. NPT, 4.9 ft (1.5 m) temp. sensor cables
3/4 in. NPT	DHM-S3-CPBSXX-M1XX15-KR	UHC-120 Meter Return, 11 gpm (2.5 m <sup>3</sup> /h) nominal, 3/4 in. NPT, 4.9 ft (1.5 m) temp. sensor cables
1 in. NPT	DHM-S3-CRCSXX-M1XX15-KR	UHC-120 Meter Return, 15.4 gpm (3.5 m <sup>3</sup> /h) nominal, 1 in. NPT, 4.9 ft (1.5 m) temp. sensor cables
1 in. NPT	DHM-S3-CRDSXX-M1XX15-KR	UHC-120 Meter Return, 26.4 gpm (6 m <sup>3</sup> /h) nominal, 1 in. NPT, 4.9 ft (1.5 m) temp. sensor cables
1-1/2 in. NPT	DHM-S3-CSESXX-M2XX15-KR	UHC-120 Meter Return, 44 gpm (10 m <sup>3</sup> /h), 1-1/2 in. NPT, 4.9 ft (1.5 m) temp. sensor cables

Temperature sensor mounting hardware included. Additional options available upon request.

**NPT Couplers**

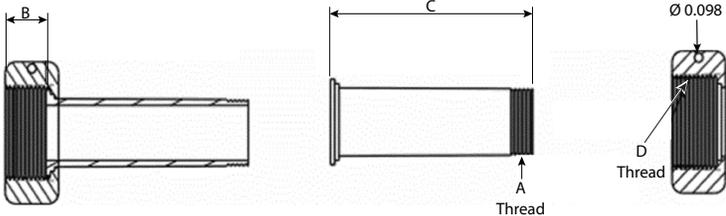


Figure 2: Coupler dimensions

Part Number	Description	B	C	BSP Thread	NPT Thread
				D	A
69234-004	1-1/2 in. NPT Coupling to Meter DN40 G2, Qty 2	0.81 ± 0.04 in.	2.81 ± 0.03 in.	G 2 in.	1-1/2 11-1/2 NPT
69234-003	1 in. NPT Coupling to Meter DN25 G1-1/4, Qty 2	0.5 ± 0.04 in.	2.62 ± 0.02 in.	G 1-1/4 in.	1-11 1/2 NPT
69234-002	3/4 in. NPT Coupling to Meter DN20 G1, Qty 2	0.47 ± 0.04 in.	2.50 ± 0.02 in.	G 1 in.	3/4-14 NPT
69234-001	1/2 in. NPT Coupling to Meter DN15 G3/4, Qty 2	0.51 ± 0.04 in.	2.38 ± 0.02 in.	G 3/4 in.	1/2-14 NPT

**Control. Manage. Optimize.**

Dynasonics is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2025 Badger Meter, Inc. All rights reserved.

**[www.badgermeter.com](http://www.badgermeter.com)**