



Vision

Turbine Flow Meters

Flow Sensor


Vision Cartridge 2000

DESCRIPTION

The small flow sensors VISION measurement technology is ideal for the accurate measurement of low viscous and non-aggressive fluids. The VISION 2000 series is most suited for the measurement of flow rates from 0.5...25 l/min. The flow sensor is a cartridge that can be plugged into an existing customer housing. The flow sensors can be mounted in any position.

MEASURING PRINCIPLE

Flow sensors are indirect volumetric meters. When the fluid passes through, a rotor is activated and the movement is either electronically or mechanically transmitted outside. The rotor is turned by the fluid force, proportional to the flow rate. A Hall effect sensor detects the passage of the rotor and supplies pulses, which can be utilized for digital or analogue signal processing. The generated pulses are specified as the K-factor. The large number of pulses provides high resolution. As the mass of the turbine is very small the response time is very short. It is not necessary to install a straight length of pipeline at the upstream side of the meter.

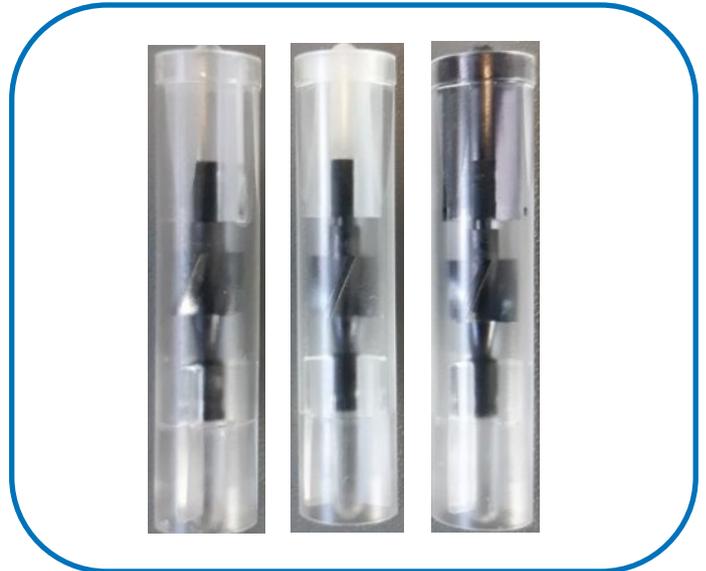

SPECIFICATIONS

Type	
	Vision Cartridge 2000
Performance	
Flow Rate	0.5...7.5 l/min for Vision Cartridge 2008 2F66 1...25 l/min for Vision Cartridge 2008 4F22
Accuracy	±3% of reading
Repeatability	< 0.5% under the same operating conditions
Operating Temperature	-20...100° C
Operating Pressure Rate	Depending on installation
Pick Up (upon request)	
Pulse Sensor	Recommended: *Hall sensor Micronas HAL 15xy (TO92UA)
Input Power	5...24V DC*
Output Signal	Open collector (NPN sinking) @ max. 20 mA, 1...2.2 kOhm pull up resistor required*
Power Consumption	Approx. 8 mA*
Installation	*Hall sensor centered above the housing close to the rotor
K-factor	4700 pulses/liter for Vision Cartridge 2008 2F66 1000 pulses/liter for Vision Cartridge 2008 4F22



Badger Meter

VIS-DS-04190-EN-02 (July 2025)

Product Data Sheet

Material	
Housing	Trogamid CX7323
Rotor	PPS Ferrite bound
Bearings	2 PTFE / graphite bearings


Fluids	
Viscosity	0.8...16 mm ² /sec (mPas/cST)
Fluid Type	Liquids
Filter	20...40 micron recommended

Installation	
Nominal Size DN	8 mm
Overall Length	49 mm
Mounting Position	In any orientation, observe flow direction
Electrical Connection	From customer side
Mechanical Connection	Plug-in housing for installation in an existing housing, no mechanical connection included


Weight	3 g
---------------	-----

Approvals	KTW-BWGL, ROHS, CE, UKCA
------------------	--------------------------

DRAWINGS

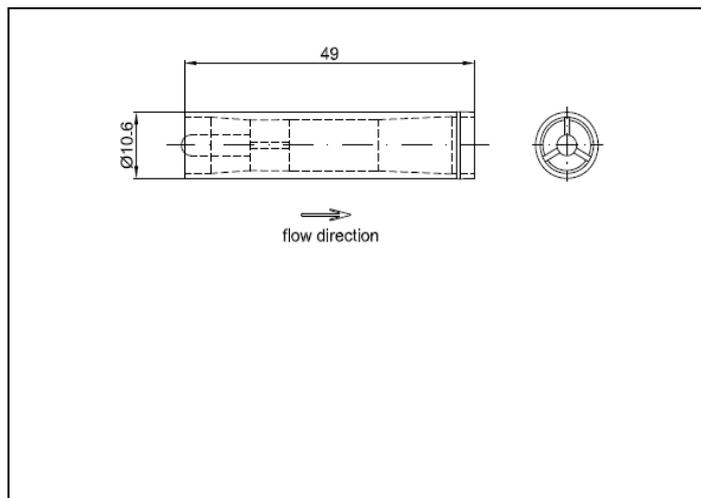

HALL SENSOR ORIENTATION

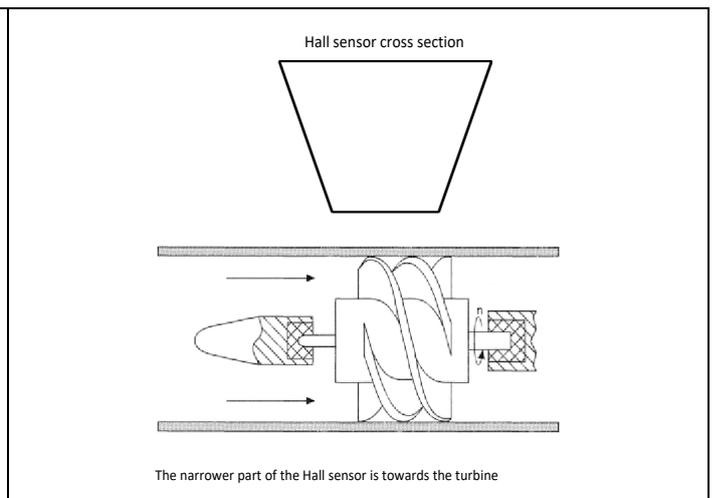

ELECTRICAL WIRING

According to the specifications of the selected Hall sensor.

ORDER CODE

VISION Cartridge 2008 2F66 for 0.5...7.5 l/min, 4700 PPL

VISION Cartridge 2008 4F22 for 1...25 l/min, 1000 PPL

Control. Manage. Optimize.

Dynasonics, AquaCUE and SoloCUE are registered trademarks of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2025 Badger Meter, Inc. All rights reserved.