ModMAG®
M-Series® | B-MAG Electromagnetic Flow Meters

Electromagnetic Flow Meters

M1000 Firmware Update Procedure

UPDATE PROCEDURE

The firmware update can be ordered with this part number: 67354-011

1. Verify that the currently installed firmware is not newer than the firmware on the USB memory stick.
2. Power OFF the meter.
3. Plug the USB cable into the micro USB port.
4. Plug the USB memory stick into the USB cable.
5. Power ON the meter.
6. While the firmware updates, the status of the procedure displays on the screen.
7. Remove the USB cable and USB memory stick when prompted.
8. When the update is complete, the display returns to the Main Menu.
9. Verify that the firmware version information is correct.
10. Clear the (T2) totalizer (*Main Menu* > *Totals*).

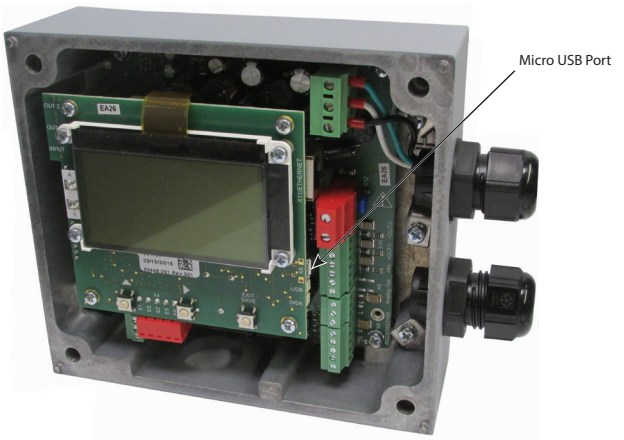

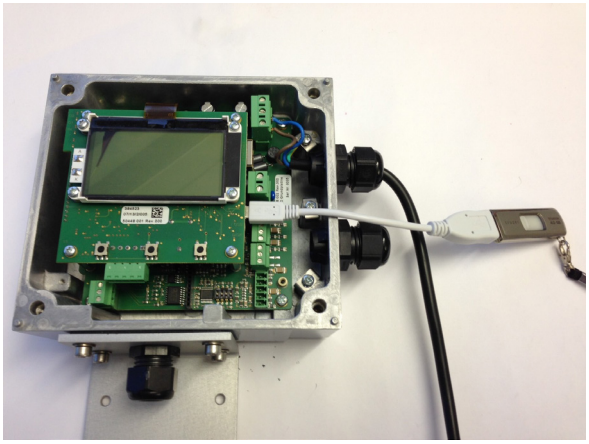

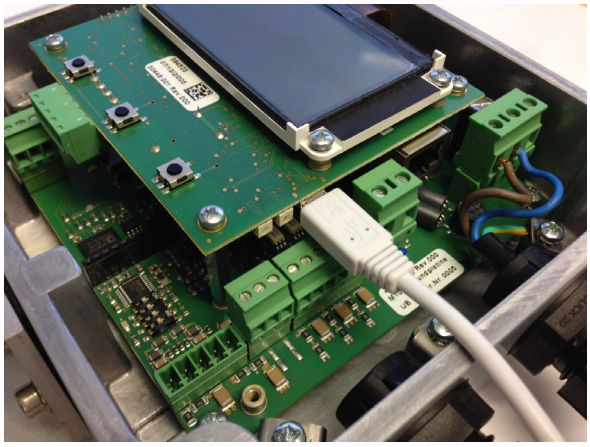

CABLE MICRO USB A-STD A (ZX40-A-5S-75-STDAJ)

Badger Meter

MAG-UM-00678-EN-02 (August 2021)

Installation Manual

Control. Manage. Optimize.

ModMAG is a registered trademark of Badger Meter, Inc. Other trademarks appearing in this document are the property of their respective entities. Due to continuous research, product improvements and enhancements, Badger Meter reserves the right to change product or system specifications without notice, except to the extent an outstanding contractual obligation exists. © 2021 Badger Meter, Inc. All rights reserved.

www.badgermeter.com